



FIG. 2

٨




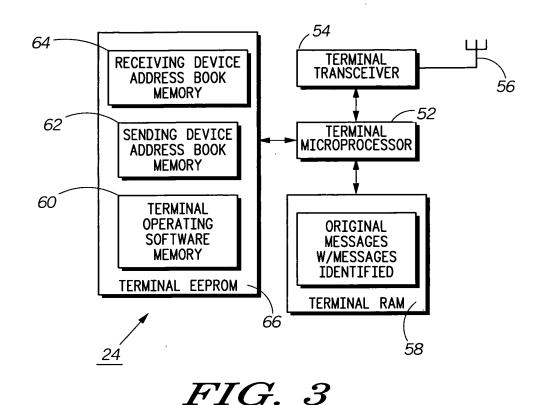

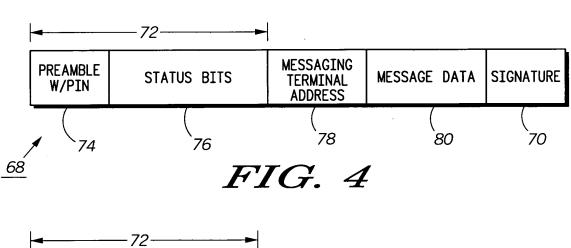

RECEIVING TWO-WAY SIG. **PREAMBLE** MESSAGE DATA SIGNATURE STATUS BITS **MESSAGING** CC W/PIN **DEVICE ADDRESS** 84 80 86 70 76 74

FIG. 5

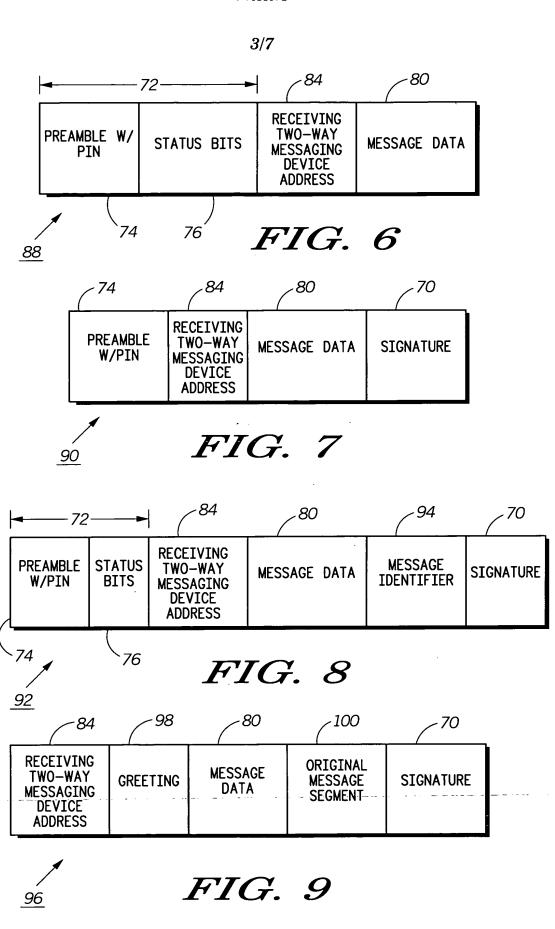

4/7


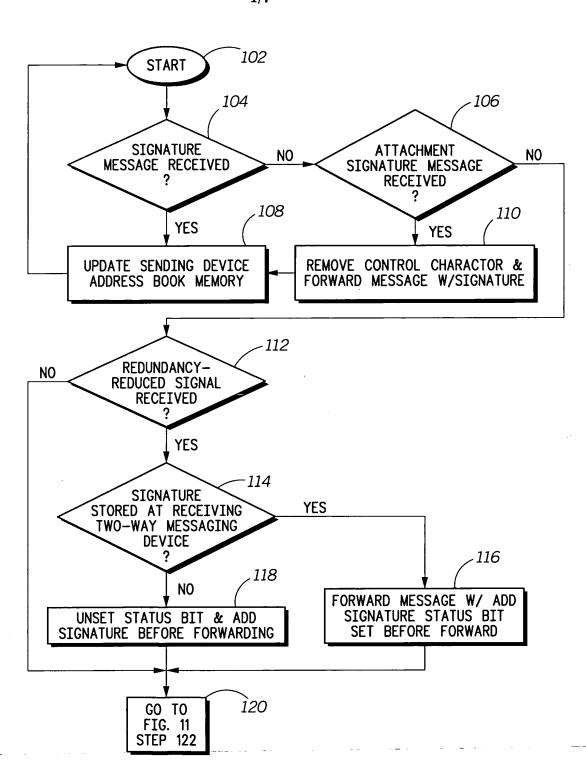


FIG. 10

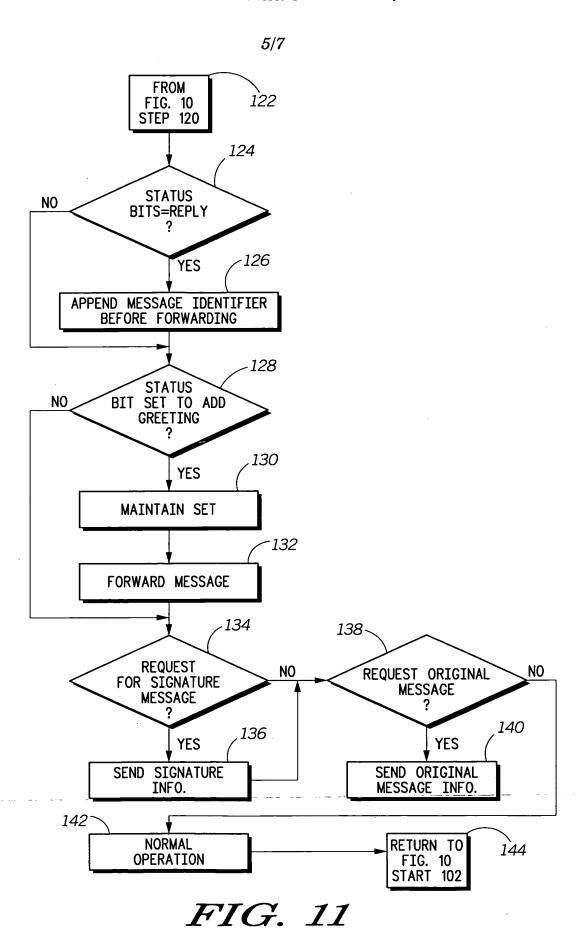

6/7

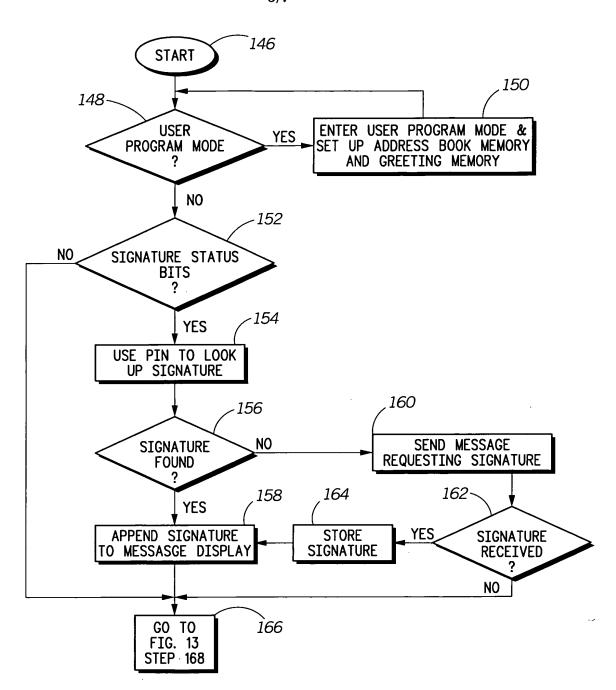


FIG. 12





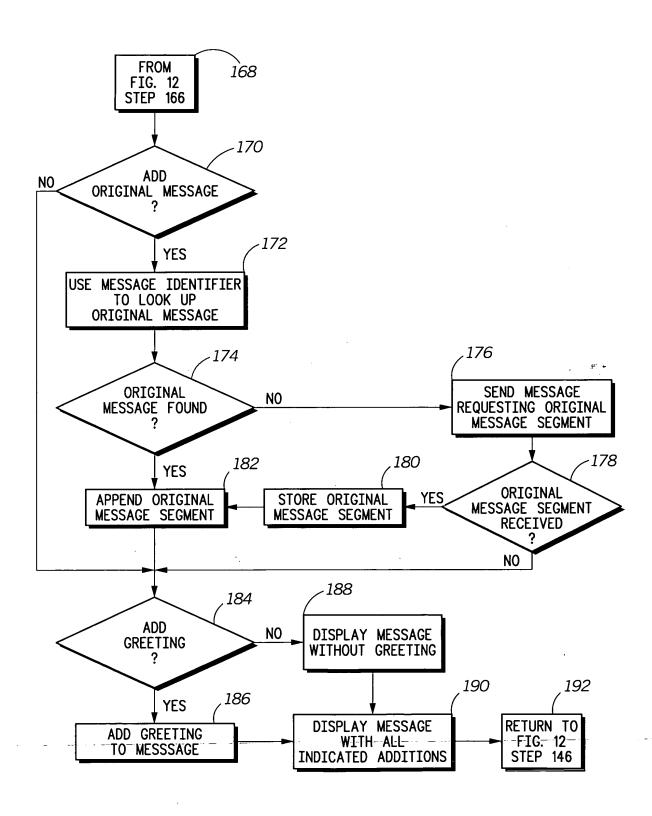


FIG. 13